


162BV Series

2-Way Ball Valve

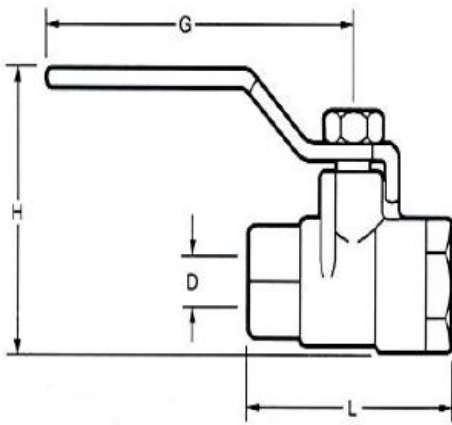

Kantleak™ Ball Valves are designed with double O-ring protection providing over 20,000 cycles without leakage and an exclusive stem seal that never needs tightening.

- Forged, brass CDA 377 body
- Chrome plated brass ball
- Blow-out proof stem
- Easy turn handle

Pressure Rating:

600 P.S.I. WOG

150 P.S.I. Saturated Steam On-Off Service

Part No.	Size	D	G	H	L	Cv
162BV-L	1/4	.44	3.50	2.38	2.25	8.0
162BV-N	3/8	.50	3.50	2.38	2.25	9.8
162BV-P	1/2	.50	3.50	2.38	2.25	9.8
162BV-R	3/4	.69	3.80	2.72	2.88	25
162BV-S	1"	.88	4.50	3.00	3.34	35

Part No.	FNPT	FNPT
162BV-L	1/4"	X 1/4"
162BV-N	3/8"	X 3/8"
162BV-P	1/2"	X 1/2"
162BV-R	3/4"	X 3/4"
162BV-S	1	X 1