



Kantleak™ Ball Valves are designed with double o-ring protection and our exclusive stem seal never needs tightening. Our valves also feature forged brass CDA 377, chrome plated brass ball, blow-out proof stem, and easy turn handle.

Pressure Rating:


Bottom Port as Inlet 500 PSI

Side Port as Inlet 100 PSI

- Forged, brass CDA 377 body
- Chrome plated brass ball
- Blow-out proof stem
- Easy turn handle
- A Style Ball

Part #	FNPT		FNPT		FNPT
120BV-L	1/4"	X	1/4"	X	1/4"
120BV-N	3/8"	X	3/8"	X	3/8"
120BV-P	1/2"	X	1/2"	X	1/2"

**Dimensions**

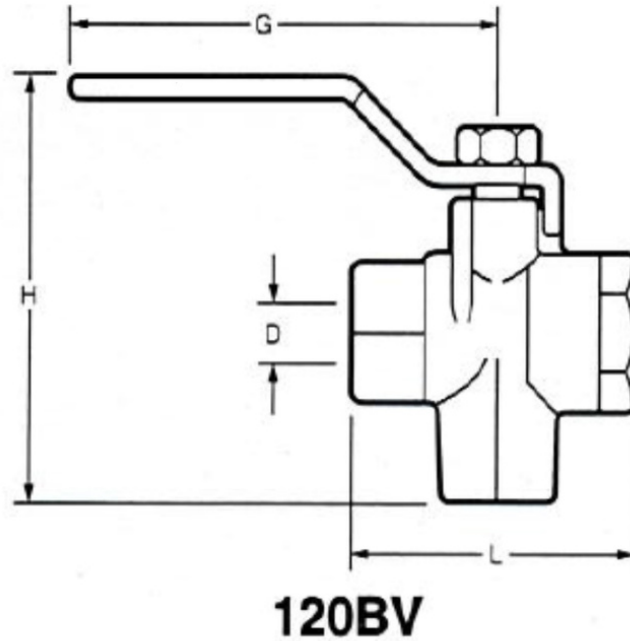

Part #	Size	D	G	H	L	Cv
120BV-L	1/4"	.44	3.50	3.12	2.2 5	5.2
120BV-N	3/8"	.50	3.50	3.12	2.2 5	5. 5
120BV-P	1/2"	.50	3.50	3.12	2.2 5	5. 5